


PLAZCRYL ACOUSTIC PANELS

- Extruded acrylic
- Dimensions: 12 to 25 mm thickness, width 2,050mm x length up to 6,000mm
- Cut to size options
- Available in clear and the following standard colors

Color	Cat' No.	LT%
LIGHT BLUE	R7010	83-86
LIGHT BLUE	R7015	61-65
SILICON GREEN	R7025	90
GLASS GREEN	R7023	87-92
LIGHT GREEN	R7022	87-89
LIGHT GREEN	R7047	80-84
APPLE GREEN	R7027	75-80
GREEN 150	R7040	68-71
FOREST GREEN	R7021	61-65
GREEN 145	R7045	47-51
GREEN 141	R7041	37-41
GREEN	R7044	6-10
TRANSPARENT YELLOW	R7029	88-91
PINK	R7035	40-44
TURQUOISE	R7046	31-35
ORANGE	R7055	41-44
MAGENTA	R7061	8-12

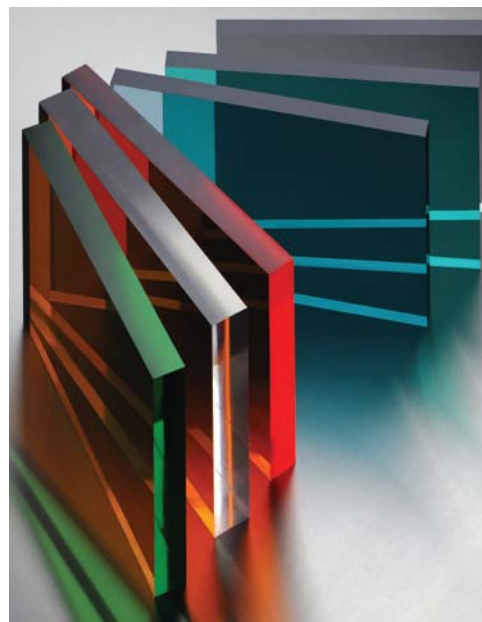

Customer matched colors upon request at minimum quantities.

PLAZCRYL ACOUSTIC PANELS AG

One side non glare panels:

Glare reflection	20° angle <10 Gloss Unit 60° angle <30 Gloss Unit 80° angle <20 Gloss Unit
------------------	--



PLAZCRYL ACOUSTIC PANELS SB

Sand blast patterns:

- For birds protection or decorative applications
- One or two side patterns according to customer request

PLAZCAST SMR-RW

Cast acrylic Steel Metal Reinforced Panel with 2mm diameter Stainless Steel rods and Stainless Steel wires, at a distance of 32mm center to center \pm 0.5mm.

PLAZCAST SMR is the best solution complying with the EN-1794-2 Annex B regulation for installation of acoustic elements along bridges, (patent apply). Sheets maintain their performances in subzero temperatures and for long periods of time.

Dimension: 2,050mm x 3,050mm.
Thickness; from 15mm up to 30mm.

